ROUGH-TERRAIN SCISSOR LIFTS

H 12 SX
H 15 SX
H 18 SX

- 20 ft x 6 ft (6 m x 1.8 m) platform.*
- 1.980 lb (900 kg) lift capacity.
- 45% gradeability.
- Standard 4 wheel drive.

* with both extension decks fully extended.

ISO 9001
GROUP
PINGUELY
HAULOTTE

ARTICULATED BOOMS | VERTICAL MASTS | TELESCOPIC BOOMS | SCISSOR LIFTS | TRAILERS

Haulotte®
ON THE UP

H 12 SX
H 15 SX
H 18 SX

Rough-terrain scissor lifts

The Haulotte® advantages

- **Double extension for increased working area**
- **Hydraulic differential lock for improved rough terrain capability**
- **35 cm / 14 in ground clearance ensures exceptional rough terrain performance**
- **Tight turning radius ensuring an excellent manoeuvrability**
- **Maximum drive speed : 6 km/h / 3,7 mph**
- **Compact stowed height and width makes transport and manoeuvrability easier**
- **Foam filled tyres**
- **Full proportional controls**
- **Load limiter in cage**
- **Robust, reliable and easy to maintain design**

STANDARD FEATURES

- Hatz "silent pack" diesel engine
- 4 wheel drive (2 front steering wheels)
- 5° tilt alarm
- 1 m / 3 ft 3 in double extension
- Load limiter in cage
- 12 V - 95 Ah batteries
- 14 V - 50 A alternator
- Removable operator's control box
- Free wheeling device
- Hourmeter
- Horn
- Towing hooks
- Hydraulic brakes
- Hydraulic stabilisers
- Manual emergency lowering system
- Automatic levelling outriggers

OPTIONS & ACCESSORIES

- Catalytic exhaust
- Rotating beacon
- Travel alarm
- Extra wide tyres 12 x 16,5
- Mains power outlet on platform
- Working light
- Encoded starting device
- Biodegradable hydraulic oil
- Motion alarm for movements and translation
- Non-marking tyres
- Cold weather kit
- Hot weather kit

CE

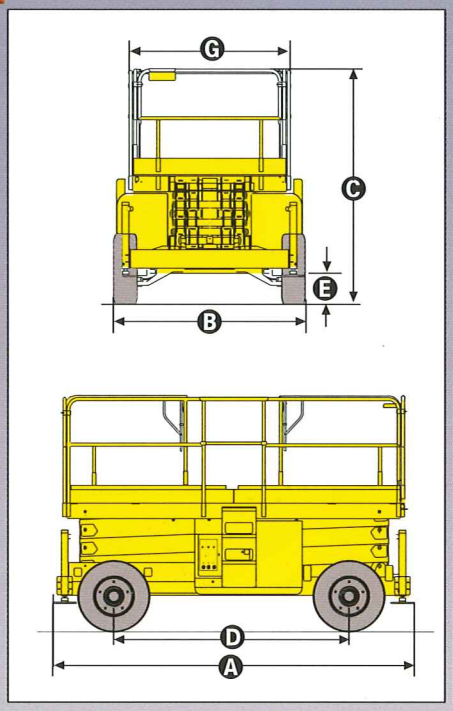

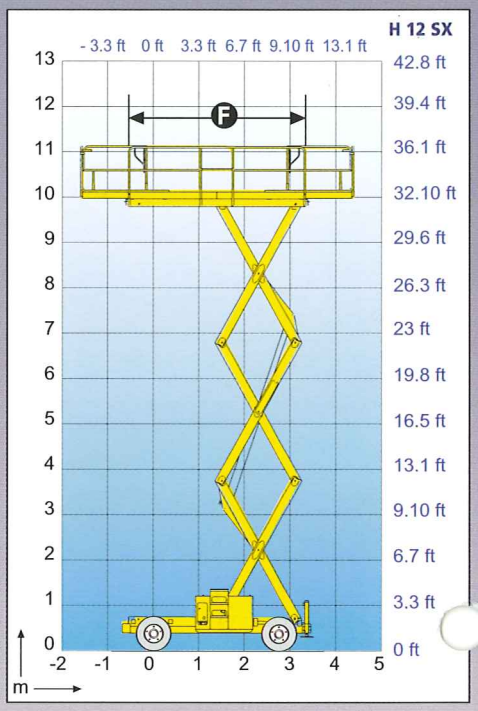

SPECIFICATIONS

	H 12 SX		H 15 SX		H 18 SX	
Working Height	*39ft*	12 m	*49ft*	15 m	*59ft*	18 m
Platform Height	*33ft*	10 m	*43ft*	13 m	*53ft*	16 m
Platform Capacity (one extension)	*1,980 lb*	900 kg	*1,540 lb*	700 kg	*1,320 lb*	600 kg
Maximum Capacity (two extensions)	*1,540 lb*	700 kg	*1,100 lb*	500 kg	*1,100 lb*	500 kg
Ⓐ Length	*13 ft 6 in* / 4.12 m					
Ⓑ Width	*7 ft 5 in* / 2.25 m					
Ⓒ Stowed Height	*8 ft 5 in*	2.57 m	*9 ft*	2.75 m	*9 ft 8 in*	2.96 m
Travel/transport Height	*5 ft 7 in*	1.71 m	*6 ft 3 in*	1.90 m	*6 ft 11 in*	2.11 m
Ⓓ Wheelbase	*9 ft* / 2.75 m					
Ⓔ Ground clearance	*14 in* / 35 cm					
ⒻxⒼ Platform size	*13 ft 1 in x 6 ft 2 in* / 4.0 m x 1.89 m					
Platform extension	*3 ft 3 in* / 1 m					
Extension capacity	*440 lb* / 200 kg					
Drive speed	*1 / 3.7 mph* / 1.6 / 6 km/h					
Outside turning radius	*16 ft 3 in* / 4.96 m					
Raise / Lower speed	43 / 65 sec.		46 / 57sec.		60 / 60 sec.	
Power source	*Diesel 32 hp - 24 kW* / Diesel 32CV - 24 kW					
Gradeability	45%					
Tilt alarm	5°		5°		3°	
Tyres (Foam Filled)	10 x 16.5"					
Hydraulic tank	*22 gallons* - 100 l					
Fuel tank	*14 gallons* - 65 l					
Weight	*11,770 lb*	5,350 kg	*13,546 lb*	6,180 kg	*16,060 lb*	7,300 kg

AS1418.10

DISTRIBUTED BY

VALGOLEM RCS LYON B 399 955 806 2420603700 - Ed. 06/2004 - Copyright © by Pinguely-Haulotte – products specifications are subject to change without notice – non contractual pictures.

Haulotte®

HAULOTTE UK LTD • Stafford Park 6 - Telford - Shropshire TF3 3AT - UK • Tel : +44 (0)1952 292753 • Fax : +44 (0)1952 292758 • e-mail: haulotte@haulotte.co.uk
HAULOTTE SCANDINAVIA AB • Aröds Industriväg 66B - 44243 Hisingsbacka - SWEDEN • Tel : +46 (0) 31 744 32 90 • Fax : +46 (0) 31 744 32 99 • e-mail: hwallin@haulotte.se
HAULOTTE AUSTRALIA PTY LTD • 65 Licola Cres - Dandenong - VIC - 3175 - AUSTRALIA • Tel : +61 (0)3 9706 6787 • Fax : +61 (0)3 9706 6797 • e-mail: sales@haulotte .com.au
PINGUELY-HAULOTTE GROUP • La Péronnière - B.P. 9 - 42152 L'Horme - FRANCE • Tél : +33 (0) 4 77 29 24 24 • Fax : +33 (0) 4 77 29 43 95 • e-mail: haulotte@haulotte.com
Web : http://www.haulotte.com